

Specifications


USB audio system for SMART Board® 600 and 800 series interactive whiteboards

Model SBA

Overview


The USB audio system for SMART Board® 600 and 800 series interactive whiteboards connects to a computer through a USB cable, and includes a powered USB hub. It can be used with SMART Board 600 and 800 series interactive whiteboards without a SMART projector. The USB audio system also includes an integrated powered USB hub with two USB connectors.

See smarttech.com for more information on this product.

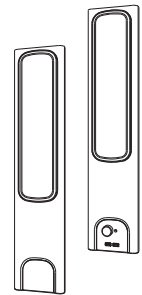

Dimensions and weights

Dimensions

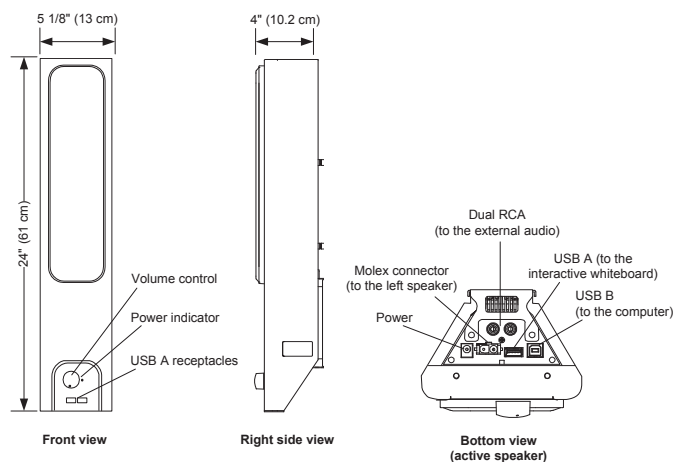

Weight (both speakers)

12 lb. 7 oz. (5.6 kg)

With brackets added

14 lb. 3 oz. (6.4 kg)

Shipping size

12 3/4" W × 8" H × 26 1/2" D
(32.4 cm × 20.3 cm × 67.3 cm)

Shipping weight

19 lb. (8.6 kg)

All dimensions ± 1/8" (0.3 cm).

All weights ± 2 lb. (0.9 kg).

Standard features

Mounting brackets

Attach the speakers directly to a SMART Board interactive whiteboard or wall-mount them.

Color

- Light gray (approximates PANTONE® Cool Gray 4 C).
- Matches the SMART UF70 projector and the SMART Board M600 series interactive whiteboard.

Volume control

A large volume dial is on the front of the right speaker.

Connectivity

- USB 2.0 receptacles on the right speaker to connect a USB drive or USB peripherals
- Dual RCA receptacles on the right speaker to connect a projector or external audio sources

SPECIFICATIONS

USB AUDIO SYSTEM FOR SMART BOARD 600 AND 800 SERIES INTERACTIVE WHITEBOARDS – MODEL SBA

Frequency range	50 Hz to 20 kHz \pm 6 dB
Output	Provides a comfortable listening volume in rooms up to 1,000 sq. ft. (93 sq. m) in size, with a 30-person capacity (subject to room acoustics).
Maximum output	14 W RMS when both channels are driven simultaneously and no other USB devices are attached to the USB hub (not including the SMART Board interactive whiteboard).
Optimal output	10 W RMS when both channels are driven simultaneously and up to two other low- or high-powered USB devices are interfaced with the USB hub.
Connection panel	Polarized Molex® connector with 25' (7.6 m) of 16 AWG wire
Power	Powered barrel connector (15 V DC, 4 A)
USB A	Connects to your interactive whiteboard
USB B	Connects to your computer
Dual RCA	Connects to your projector or an external audio source such as a VCR or DVD/Blu-ray™ player
USB device support	Powered USB 2.0 hub.
Power requirements	Switching power supply (100V–240V AC, 50 Hz–60 Hz, 1.5A) and a 6' (1.8 m) country specific power cord (15V DC, 4000 mA, 60 VA, positive tip)
Operating specifications	41°F to 95°F (5°C to 35°C) with up to 80% humidity, non-condensing

Certification and compliance

Regulatory certification	UL (Canada/U.S.), CE, FCC, IC, C-Tick
Environmental compliance	China EIP; EU RoHS, REACH, Packaging and WEEE; U.S. Packaging and Conflict Materials

Purchasing information

Order number	
SBA	USB audio system for SMART Board 600 and 800 series interactive whiteboards
Optional accessories	See smarttech.com/accessories
Warranty	One-year limited equipment warranty

smarttech.com/support
smarttech.com/contactsupport

© 2010–2014 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 05/2014.