

SAVANT

Savant® Button Remote (RTR-1000-06) Quick Reference Guide

For Product Info



Box Contents

- (1) Traditional Remote Control (RTR-1000-06)
- (2) AA Batteries (014-0028-xx)
- (1) Quick Reference Guide (this document)


Required Components

Savant System Host
SSC-W1031 (RF gateway)
Savant Design and Configuration Tools.

Specifications

Environmental	
Temperature	32° to 104° F (0° to 40° C)
Humidity	10% to 80% Relative Humidity (non-condensing)
Dimensions and Weight	
Height	6.8 in (172.2 mm)
Width	2.2 in (55.4 mm)
Depth	1.2 in (29.2 mm)
Weight	Net: 0.35 lb (0.16 kg) Shipping: 1.00 lb (0.45 kg)
Power	
Power Supply	Two AA batteries Three month minimum in normal operation mode
Regulatory	
Safety and Emissions	FCC Part 15 CE C-Tick
RoHS	Compliant
Minimum Supported Release	
Savant OS: da Vinci 8.8	


Rear Panel

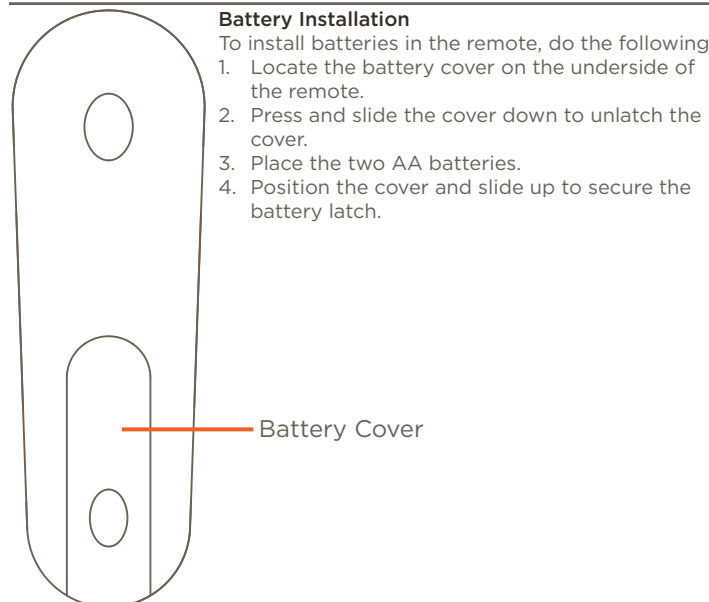

Savant UID

The Savant unique identification (UID) of the remote can be found inside the battery cover. This is used in Blueprint to assign the remote to a zone.

Front Panel

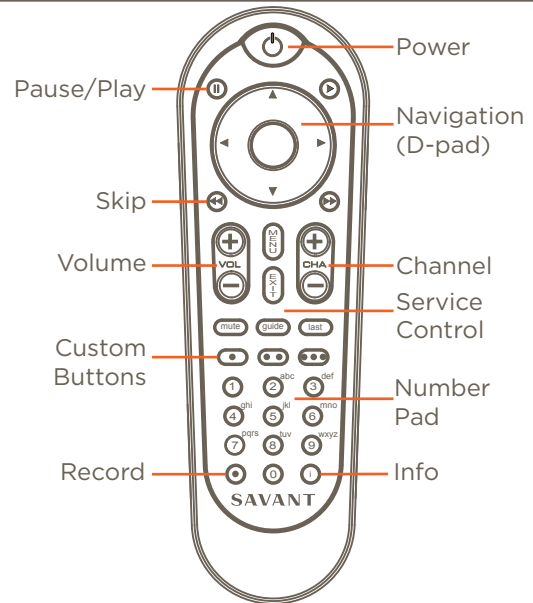

Power Button	Power off the active service - or - Power on the last active service.
Pause/Play	Pause button on the left Play button on the right
Skip	Skip back on the left Skip forward on the right
Volume	Increase or decrease volume of the zone.
Custom Buttons	Configurable from Blueprint.
Navigation (D-pad)	- Standard up, down, left, and right arrows for on-screen control. - Press the Select button at the center of the D-pad to select the highlighted item.
Channel	Channel Up or Channel Down the active service.
Service Control	Menu, Exit, Mute, Guide, and Last buttons. Function change depending on Active Service. NOTE: Not all services are affected by all buttons.
Number Pad	0 to 9 buttons used to enter numbers and letters for some services.
Record	Record - not all services use this button
Info	Info button - not all services use this button.

Binding Remote to SSC-W1031

To bind a Savant Button Remote to a SSC-W1031, do the following.

1. Press the reset button on the SSC-W1031 and Status LED will become Red.
2. On the Savant Button Remote press and hold the Up Arrow and Select buttons on the Navigation (D-pad).
3. When the binding is successful the Status LED on the controller will return to Green.